

SHURE

SHURE®

Sound Isolating™ Earphones




Shure Sound Isolating™ Earphones, built with balanced armature speakers, deliver a detailed soundstage free from outside noise. The powerful and stylish Shure SE earphones come with a detachable cable, adapters, a durable carrying case, and interchangeable Sound Isolating™ sleeves for a comfortable and personalized fit.

Detachable Cable

You may need to detach the cable from the earphones to attach optional components or to replace the cable if it becomes damaged. To prevent accidental separation, the connector has a snug fit. Take special care to prevent damage to the earphone and connector.


- Do not use pliers or other tools.
- Grasp the connector and the earphone as close as possible to where they join.
- Pull straight apart—do not twist. Cable is a snap fit, not threaded.
- Do not pull on the cable or put any pressure on the earphone nozzle.
- Listen for a click when connecting.
- When reattaching the cable, match the "L" and "R" markings. For clear cables and earphones, match the color dots (Red = Right, Blue = Left).

Note: If you pull at an angle, the connector will not detach.

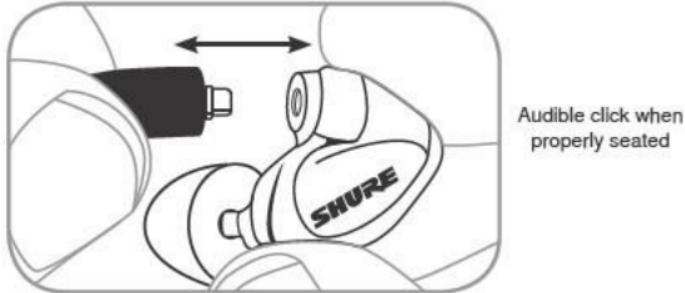

Wearing the Earphones

The following are some suggested ways of wearing the earphones.

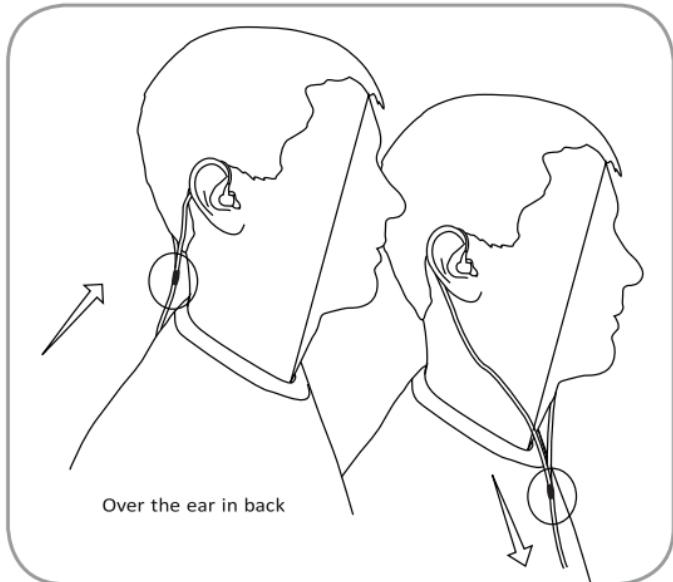

Wearing the cable over the ear and securing it behind the head can help keep the earphones in place during physical activity


Tighten the cable and take up slack by raising the cable cinch.

Inserting the Earphones




Insert the earphones so they form a tight seal. The fit of the earphone can greatly affect sound quality.

Important: If there seems to be a lack of low frequency response (bass), this means that the earphone sleeve is not forming a tight seal. Gently push the earphone deeper into the ear canal or try a different sleeve.



Warning: Do not push the earphone sleeve beyond the ear canal opening.

Changing Sleeves



Twist and pull to remove the sleeve from the nozzle.




Slide on a new sleeve so that it completely covers the barb and the nozzle.

Caution: If the barb or any of the nozzle is exposed, the sleeve is not properly installed. Replace sleeves if they do not tightly grip the nozzle.

To ensure proper fit and performance, use only sleeves supplied by Shure (unless using custom molded sleeves).

Removing the Earphones

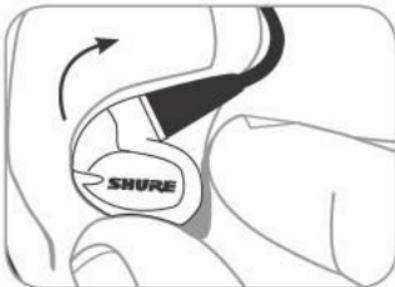

Grasp the body of earphone and gently twist to remove.

Note: Do not pull on cable to remove earphone.

Choosing a Sleeve

Select an earphone sleeve that provides the best fit and sound isolation. It should be easy to insert, fit comfortably, and easy to remove.



Soft Flex Sleeves: In small, medium, and large sizes. Made from pliable rubber.




Soft Foam Sleeves: Compress the foam sleeve between your fingers and insert into the ear canal. Hold in place for about ten seconds while the foam expands.



Triple-Flange Sleeves: If desired, use scissors to trim the stem on the sleeve.

Cleaning the Earphone Nozzle

If you notice a change in sound quality, remove the sleeve and check the nozzle of your earphone. If nozzle is blocked, clear obstruction by using wire loop end of cleaning tool.

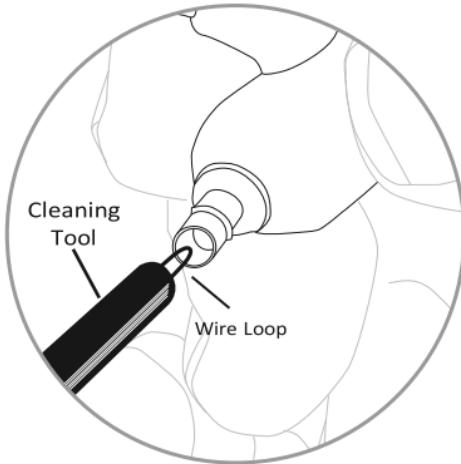

Caution: When cleaning, do not force any object through the earphone nozzle! This will damage the earphone sound filter.



Warning: The cleaning tool is only to be used to clean the earphones. Any other use, such as using the tool to clean ears, could result in injury.

Accessories

- Earphone Sleeves
- Replacement Cables
- Carrying Cases
- Music Phone Accessory Cables
- Volume Control
- Adapters

Maintenance

- Careful maintenance ensures a tight seal between the sleeve and nozzle, improving sound quality and product safety.
- Keep the earphones and sleeves as clean and dry as possible.
- To clean sleeves, remove them from earphones, gently rinse in warm water and air dry. Foam sleeves require a longer drying time. Inspect for damage and replace if necessary. Ear sleeves must be completely dry before reusing.
- Wipe the earphones and sleeves with mild antiseptic to avoid infections. Do not use alcohol-based disinfectants.
- Do not expose earphones to extreme temperatures.
- Replace the sleeves if they do not fit properly.
- Do not attempt to modify this product. Doing so will void the warranty and could result in personal injury and/or product failure.
- **Note:** The cable connectors to the earphones may collect debris or other deposits that can affect audio quality. If this happens, disconnect the cables and clean them using a dry cotton swab.

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Technical Specifications

SE535LTD – Red

Transducer type	Triple balanced-armature drivers
Sensitivity (at 1khz)	119 dB SPL/mW
Impedance (at 1kHz)	36 W
Frequency Range	18 Hz - 19.5 kHz
Input connector	3.5mm (1/8 in.) gold-plated stereo plug
Net weight	30 g (1 oz.)
Operational temperature	-18° C to 57° C (0° F to 135° F)
Storage temperature	-29° C to 74° C (-20° F to 165° F)

CERTIFICATION

Eligible to bear CE Marking. Conforms to EMC Directive 2004/108/EC. Meets applicable tests and performance criteria in European Standard EN55103 (1996) parts 1 and 2, for residential (E1) and light industrial (E2) environments. The Declaration of Conformity can be obtained from the address below.

Shure Europe GmbH

Authorized European representative:

Shure Europe GmbH

Headquarters Europe, Middle East & Africa

Department: EMEA Approval

Jakob-Dieffenbacher-Str. 12,

75031 Eppingen, Germany

Phone: +49-7262-92490 Fax:

+49-7262-9249114

Email: EMEAsupport@shure.de



SHURE®

SHURE Incorporated <http://www.shure.com>

United States, Canada, Latin America, Caribbean:
5800 W. Touhy Avenue, Niles, IL 60714-4608, U.S.A.

Phone: 847-600-2000 U.S. Fax: 847-600-1212 Int'l Fax: 847-600-6446

Europe, Middle East, Africa:

Shure Europe GmbH, Phone: 49-7262-92 49 0 Fax: 49-7262-92 49 11 4

Asia, Pacific:

Shure Asia Limited, Phone: 852-2893-4290 Fax: 852-2893-4055