

## How to connect

MX Master comes pre-paired with a Unifying receiver. (You can also pair the mouse with any other Unifying receiver.)

Use *Bluetooth* Smart wireless to connect MX Master to any *Bluetooth*® Smart Ready computer.

### To connect with the pre-paired Unifying receiver

1. On the mouse, press the Easy-Switch button to select a channel.
2. Press the Connect button.
3. On the computer, plug the Unifying receiver into a USB port.
4. Upon pairing, the selected channel light on your mouse stops blinking and remains steady for 5 seconds.


The computer stays connected on this channel unless you connect it to a different channel or use the channel to set up a different connection.

A slowly blinking light means the mouse was unable to complete the connection.

### To connect with *Bluetooth* Smart technology

1. On the mouse, select a channel.
2. Press the Connect button.
3. Complete the pairing on your *Bluetooth* Smart Ready computer.

List of *Bluetooth* Smart Ready devices:

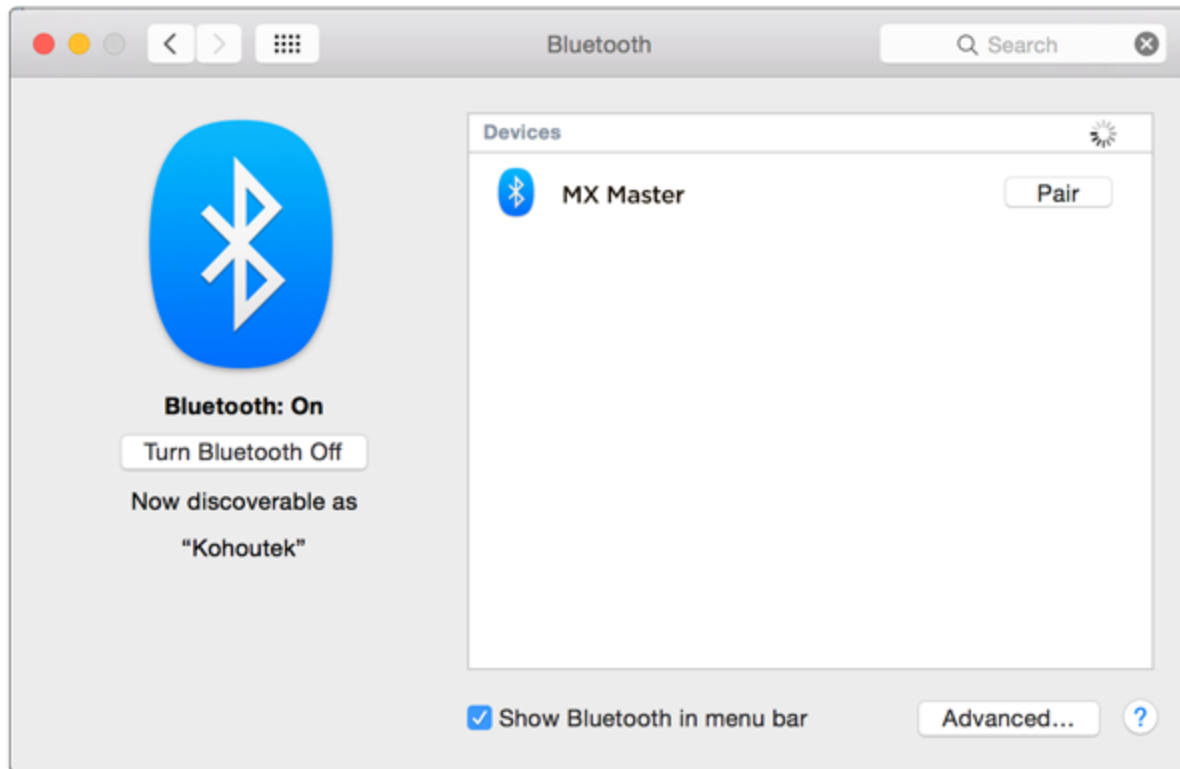


Mac OS X

4. Open System Preferences and click **Bluetooth**.
5. Select MX Master in the Devices list and click Pair.

Follow the onscreen instructions to complete the pairing.

Upon pairing, the selected channel light on your mouse stops blinking and remains steady for 5 seconds.

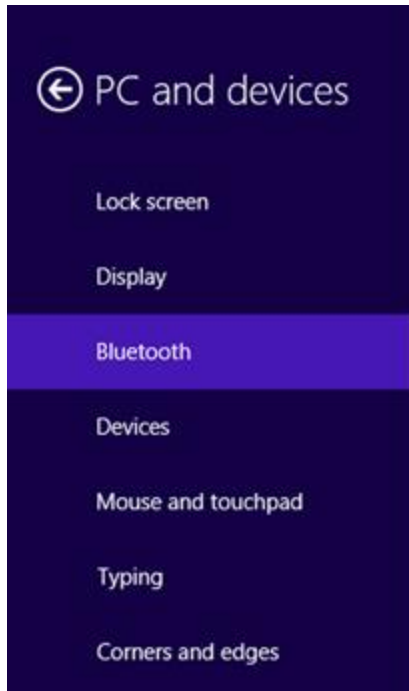

## Manage Bluetooth devices

Your PC is searching for and can be discovered by Bluetooth devices.



Windows 8

4. Go to Settings and click PC and Devices.
5. Select **Bluetooth**.
6. In the list of *Bluetooth* devices, select MX Master and click Next.
7. Follow the onscreen instructions to complete the pairing.

Upon pairing, the selected channel light on your mouse stops blinking and remains steady for 5 seconds.

### **ADD DEVICES**

After making an initial connection, set up other computers on the remaining channels using either Unifying or *Bluetooth* Smart. MX Master connects with up to three devices.

### **SELECT CHANNELS (AND DEVICES)**

After setting up connections with up to three computers, switch among them by selecting the channel on which the desired device is connected.



Press the Easy-Switch button to cycle through the three channels. When a channel is selected, the channel number is lit.

### **To select a Channel**

1. On the mouse, press the Easy-Switch button.
2. When the connection is active, the channel light remains steady for 5 seconds.

The backlit channel number provides information about the connection.

<b>If the light is...</b>	<b>MX Master is...</b>
Steady	Connected
Blinking (fast)	Discoverable ...
Blinking (slow)	Pairing